




BLADE ARROW




WELD-ON & BOLT-ON HALF ARROW UNDERGROUND LIP SHROUD OPTIONS

HD Weld-on Blade Arrow edge

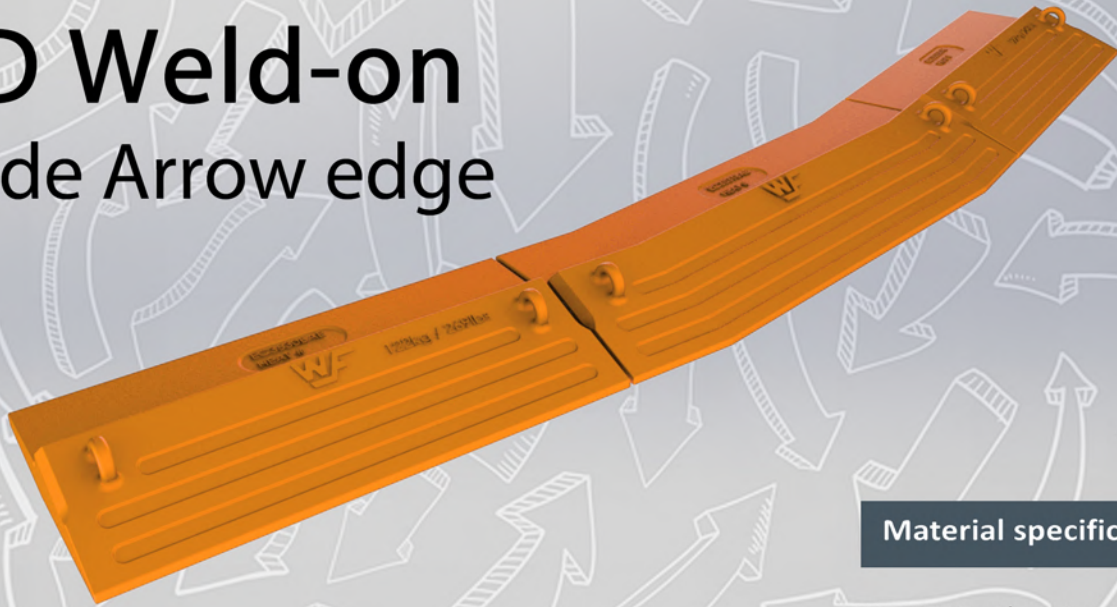


Material specifications

WF-0500: Abrasion Resistant Steel
Tensile Strength: >1275 Mpa
Yield Strength: >1130 Mpa
Hardness: 400-460 BHN



EC3530BAE
EC3534BAE

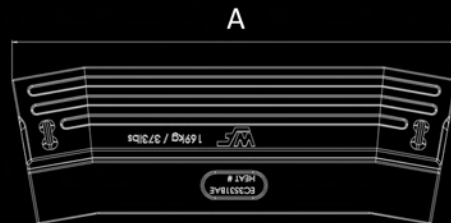

EC3531BAE



Product Code	Description	Weight	A	B	C
EC3530BAE	Centre Arrow edge 800	122kg 269lbs	800mm 31.5"	388mm 15.27"	96mm 3.77"
EC3534BAE	Centre Arrow edge 1150	174kg 384lbs	1150mm 45.28"	388mm 15.27"	96mm 3.77"
EC3531BAE	Transition Arrow edge	169kg 373lbs	1174mm 46.22"	388mm 15.27"	96mm 3.77"

Bolt-on

Blade Arrow edge




BENEFITS


- Lighter than mechanical
- Cost-effective
- Weld free

Material specifications

WF-0600: Abrasion Resistant Steel
Tensile Strength: >1275 Mpa
Yield Strength: >1330 Mpa
Hardness: 460 - 510 BHN

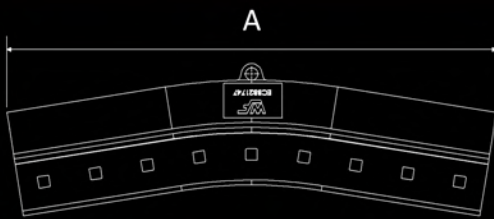

ECBB21747

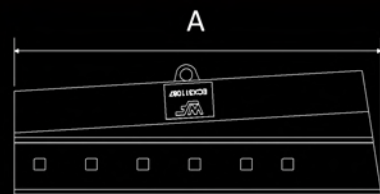

ECX311086
ECX311087

Product Code	Description	Weight	A	B	C	Bolts	Qty
ECBB21747	Transition Arrow edge Bolt-on	101kg 223lbs	1185mm 46.64"	328mm 12.92"	70mm 2.75"	1x 3" Plow Bolts	9
ECX311086	R/H Corner Arrow edge Bolt-on	89kg 157lbs	902mm 35.5"	305mm 12"	70mm 2.75"	1x 3" Plow Bolts	6
ECX311086	L/H Corner Arrow edge Bolt-on	89kg 157lbs	902mm 35.5"	305mm 12"	70mm 2.75"	1x 3" Plow Bolts	6

Complementary products - Full Bucket protection



Heelblocks, Gussets + more

We have a range of heelblocks and additional castings especially designed for LHD machines, which protect the under edges, top corners and internals from wear and impacts.



Wearstrips and profile bars

With onsite cutting facilities, we recommend that our customers use C4800 or C8000 - an advanced high resistant performance steel with better wear properties than conventional Q&T plate - for all profile bars and strips to protect their buckets and extend shroud wear-life.



Grouser Bars

We stock a range of grouser bars to protect bucket cheeks and critical areas from wear that do not disrupt the in and outward flow of material.

Wearplate

Cut and rolled to your requirements, we can supply you with wear skins for your buckets manufactured from QT450 grade plate or similar.

Head office - Australia
Address 533 Abernethy Road,
Kewdale, Western Australia 6105
Tel +61 (0) 8 9353 6111
Fax +61 (0) 8 9353 6188
Email sales@wearforce.com.au

www.wearforce.com.au

Kalgoorlie Branch- Australia
Address 5 Hudson Place, West
Kalgoorlie, Western Australia, 6430
Tel +61 (0) 8 9022 8035
Fax +61 (0) 8 9022 8032
Email sales@wearforce.com.au

www.wearforce.com.au

North American Office
Address 359 New St,
Quakertown, PA 18951, USA
Tel +1 (215) 996 1770
Fax +1 (215) 822 1423
Email sales@wearforcena.com

www.wearforcena.com